

DUMA



浙江杜马缝纫机股份有限公司

ZHEJIANG DUMA SEWING MACHINE CO., LTD.

地址：浙江省台州市椒江区机场南路58号

电话：0576-89086969 传真：0576-89086999

网址：www.cnduma.com



DM-1949

多轴联动上下送料电脑平缝机

Multi-axes moving Bottom and Top-feed Lockstitch Machine



全新触控显示屏:
Touch screen panel:

4.3英寸彩色触摸屏, 内容直观, 操作便捷
with 4.3 inch colorful touch screen panel operate simple and convenient

封闭式油盘:
Sealed oil pan

保持机器内部清洁, 延长机械使用寿命
Keep the inside of the machine clean and extend the life

超耐磨针杆:
DLC needle bar

采用黑金刚针杆, 可有效减少漏油并极大限度延长使用寿命
Adopt DLC needle bar, reduces oil leakage and greatly extends using life

家族式外观:
Family Appearance

沿用杜马家族式脸谱, 方正的轮廓结合流线型线条使外观刚中带柔, 产品识别度高。
Adopt DUMA family appearance, new style fashion, with high recognition

多轴联动上下送料电脑平缝机

- 家族式外观: 沿用杜马家族式脸谱, 方正的轮廓结合流线型线条使外观刚中带柔, 产品识别度高。
- 全新触控显示屏: 4.3英寸彩色触摸屏, 内容直观, 操作便捷。
- 超耐磨针杆: 采用黑金刚针杆, 可有效减少漏油并极大限度延长使用寿命。
- 封闭式供油循环: 保持机器内部清洁, 延长机械使用寿命。

Multi-axes moving Bottom and Top-feed Lockstitch Machine

- Adopt DUMA family appearance, new style fashion, with high recognition
- 4.3 inch colorful touch screen panel operate, simple and convenient.
- use DLC needle bar reduces oil leakage and greatly extends using life,
- Sealed oil pan it Keep the inside of the machine clean and extend the life .

型号Model: DM 1949


用途Application :	薄料 - thin material	自动抬压脚高度 : Auto foot lifter height :	10mm
最高转速 : Max.Sewing speed :	4500RPM	主轴马达 : Main shaft :	Ac伺服马达 AC servo motor 220V 550W
使用机针 : Needle :	Dbx1 11#-18#	针距控制 : Stitch lenght control :	步进马达 Step-motor
针杆行程 : Needle bar stroke :	31mm	抬压脚 : Foot lifter :	步进马达 Step-motor
送布牙高度 : Height of feed dog	1mm	切线 : Trimming :	步进马达 Step-motor
最大针距 : Max.stitch length :	5mm	润滑方式 : Lubricating system :	微油润滑Mini-oil
手动抬压脚高度 : Handle foot lifter height :	6mm	净重/毛重 : N.W/G.W :	39.7/42.5kg



摆油轴(防止错层功能):

Multi-axes moving Bottom and Top-feeding:

压脚与送布牙同步运动, 送布更顺畅, 缝制不起皱。
press foot and teeth moving together that make feeding more smoothly and Prevention crinkle

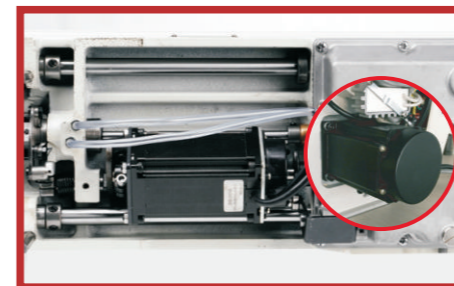

步进马达双向驱动技术(专利技术):

Step Motor bidirectional driven technology (Patent) :

一个马达完成切线和抬压脚动作, 实现静音操作


步进马达控制针距与倒缝:
Step motor control stitch and Reserve sewing:
one step motor control trimming and Pressing foot lifter work, and make the mute operation come true.



双动刀剪线:

double round movable blue thread trimmer:

可在机针正下方完成剪线, 缝纫后线头最短3mm, 可有效减少人工剪线的工作量。
achieve trimmer thread can be below needle, then remaining thread can be as short as 3MM, effectively reduce man manual trimming workload.

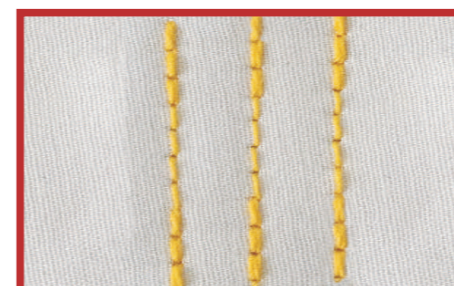

高品质加固缝线迹:

High quality start and end back-tacking stitch length:

步进马达精准控制送料行程, 使每个针距的加固缝线迹完全重合
Step motor accurate control feeding, make the back-tacking stitch perfect trimming .